查询RGP15D供应商

1.5 Amp. Glass Passivated Fast Recovery Rectifier

Dimensions in mm. DO-15 (Plastic)

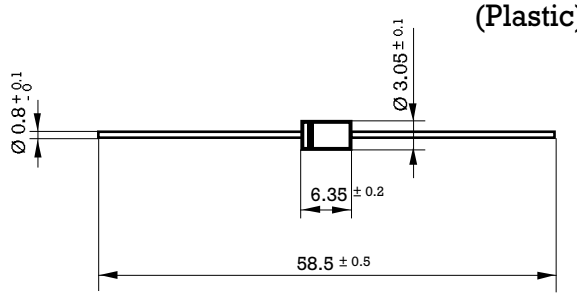

Mounting instructions

1. Min. distance from body to soldering point, 4 mm.
2. Max. solder temperature, 350 °C.
3. Max. soldering time, 3.5 sec.
4. Do not bend lead at a point closer than 2 mm. to the body.

Voltage
50 to 1000 V.

Current
1.5 A. at 55 °C.

HYPERECTIFIER®

- **Glass passivated junction**
- High current capability
- The plastic material carries U/L recognition 94 V-0
- Terminals: Axial Leads
- Polarity: Color band denotes cathode

Maximum Ratings, according to IEC publication No. 134

		RGP 15A	RGP 15B	RGP 15D	RGP 15G	RGP 15J	RGP 15K	RGP 15KT	RGP 15M	RGP 15MT
V_{RRM}	Peak recurrent reverse voltage (V)	50	100	200	400	600	800	800	1000	1000
$I_{F(AV)}$	Forward current at Tamb = 55 °C	1.5 A								
I_{FRM}	Recurrent peak forward current	10 A								
I_{FSM}	8.3 ms. peak forward surge current (Jedec Method)	50 A								
t_{rr}	Max. reverse recovery time from I_F = 0.5 A, I_R = 1 A, I_{RR} = 0.25 A	150 ns				250 ns	500 ns	300 ns	500 ns	300 ns
T_j	Operating temperature range	– 65 to + 175 °C								
T_{stg}	Storage temperature range	– 65 to + 175 °C								
E_{RSM}	Maximum non repetitive peak reverse avalanche energy. I_R = 1A ; T_J = 25 °C	20 mJ								

Electrical Characteristics at Tamb = 25 °C

V_F	Max. forward voltage drop at I_F = 1.5 A	1.3 V
I_R	Max. reverse current at V_{RRM} at 25 °C at 150 °C	5 µ A 200 µ A
R_{thj-a}	Thermal resistance (I = 10 mm.) Max. Typ.	50 °C/W 30 °C/W

Rating And Characteristic Curves

TYPICAL FORWARD CHARACTERISTIC

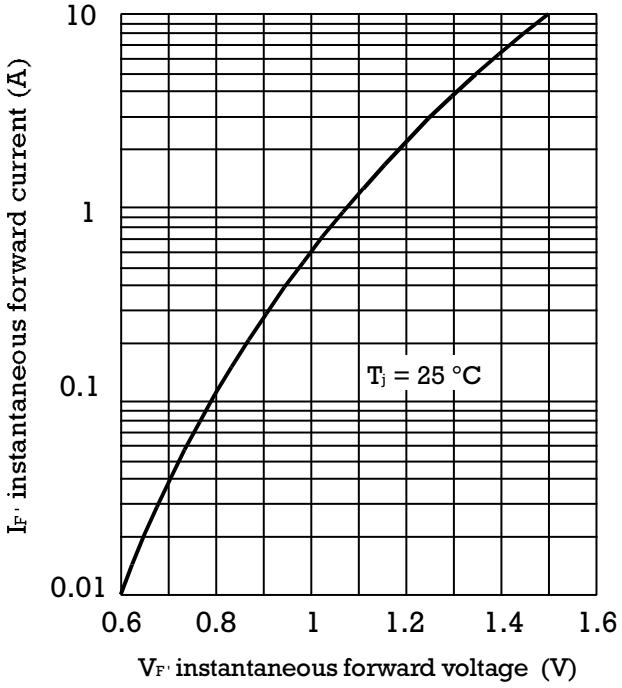

FORWARD CURRENT DERATING CURVE

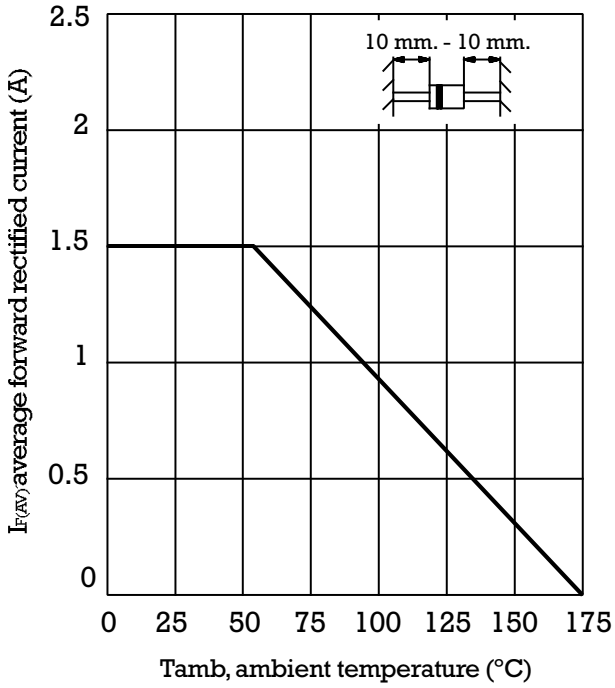

MAXIMUM NON REPETITIVE
PEAK FORWARD SURGE CURRENT

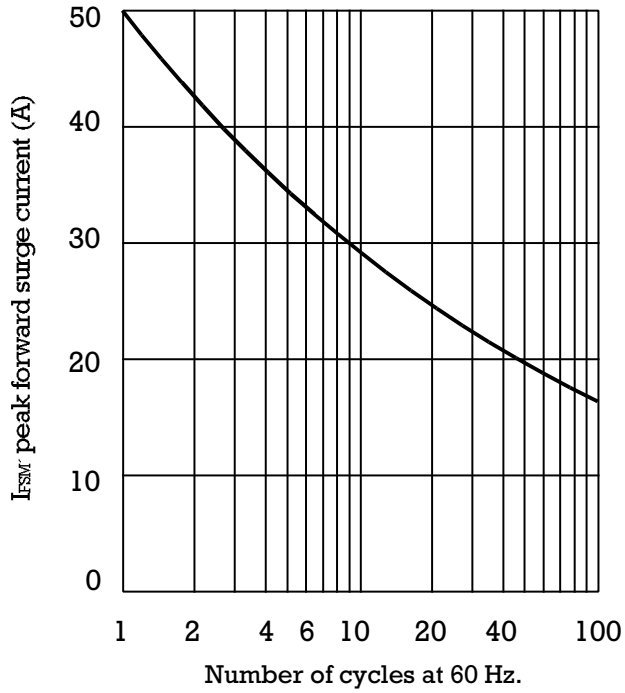

TYPICAL JUNCTION CAPACITANCE